



REVISION BLOCK table with columns: REV, DESCRIPTION, DATE, INCORP BY. Includes a detailed FIO-E pinout table with columns: Pin, Signal Name, Index, and Notes.

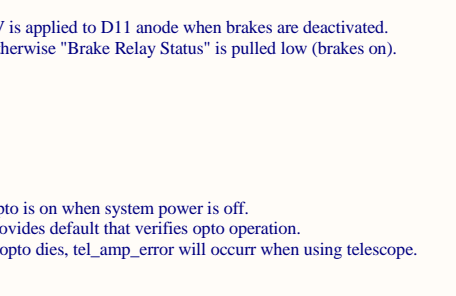

5V is applied to D11 anode when brakes are deactivated. Otherwise 'Brake Relay Status' is pulled low (brakes on). Opto is on when system power is off. Provides default that verifies opto operation. If opto dies, tel_amp_error will occur when using telescope.

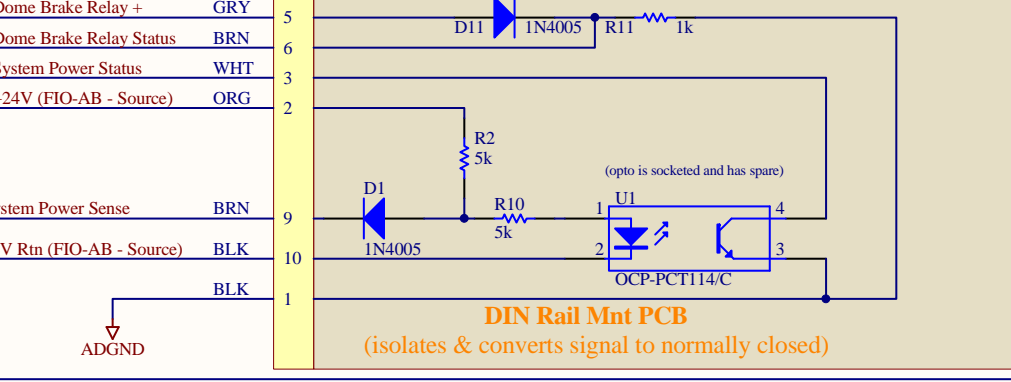

DIN Rail Mnt PCB (isolates & converts signal to normally closed)