




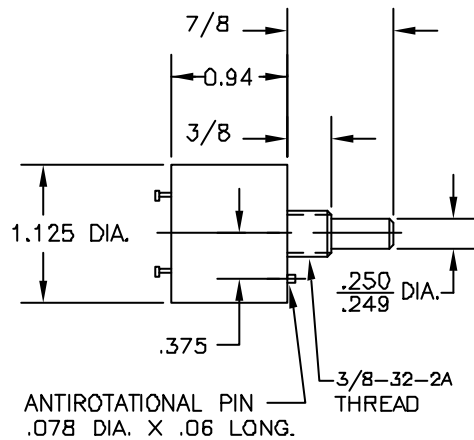

MOUNTING
4-40
EXTRUDED
THREADED
HOLE
2 PLACES

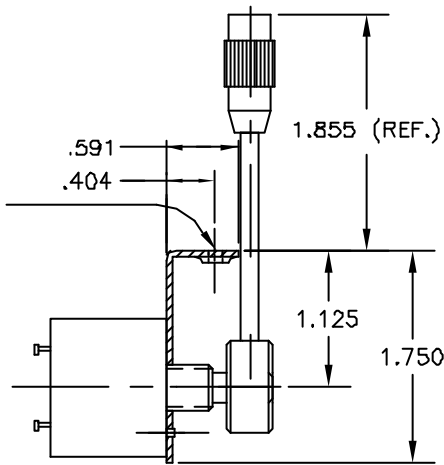


MOUNTING "L" BRACKET
(OPTIONAL) ONLY TO
BE USED WITH
DETACHABLE KNOB (TYPE F).




SCHEMATIC AS VIEWED
FROM SHAFT END.

REVISIONS				
C/L	DESCRIPTION	BY	APP'D	DATE
N	ADDED NOTES 11 & 12	AD	MKG	4/23/02
P	DIM. 2.98 WAS 3-1/16, 1.855 WAS 1.937	AD	JAH	1/13/03
Q	REV. NOTES 3 & 5	AD	JAH	2/18/03

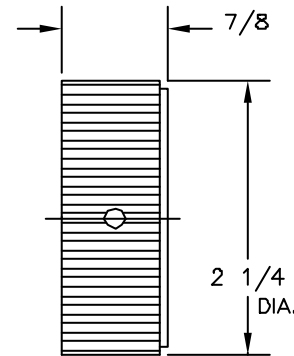

DETACHABLE KNOB
(TYPE G)

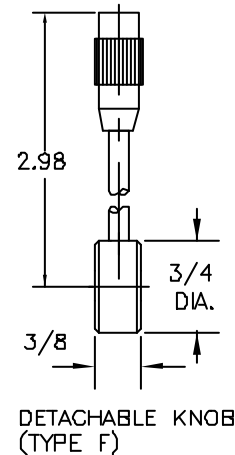

DETACHABLE KNOB
(TYPE F)

203	20,000
103	10,000
502	5,000
102	1,000
501	500
251	250
DASH NO.	RESISTANCE

PART NO. DESIGNATION	
SAJ2515-F-502	RESISTANCE (5K)
	KNOB TYPE
	BASIC NUMBER

12. OPERATING TEMPERATURE RANGE: -30° TO +105°C.
11. LIFE: 5,000,000 CYCLES.
10. LINEARITY ±2%.
9. KNOB TORQUE: 12 OUNCE-INCHES, NOMINAL.
8. WITH CENTER TAP AT SPRING CENTER.
7. HARDWARE: LOCKWASHER AND HEX NUT.
6. POWER: 1 WATT AT 25°C.
5. ELECTRICAL ANGLE: 140° TOTAL TRAVEL (±70°±5° FROM CENTER).
4. SPRING RETURN PHASED TO CENTER OF VOLTAGE.
3. MECHANICAL ANGLE: 140° TOTAL TRAVEL (±70°±5° FROM CENTER).
2. CONDUCTIVE PLASTIC POTENTIOMETER.
1. TOTAL RESISTANCE ±20% (SEE CHART).

Precision Sales Inc
www.precisionsales.com
610-359-1002
eparts@precisionsales.com